

非标 PVC 电子线


说明:

- 导体使用单条或多条, 裸铜或镀锡铜
- PVC绝缘
- 额定温度: 60℃ 额定电压30V
- 易剥, 易裁剪
- 具抗酸碱, 耐油之特性

用途:

- 电子产品的内部配线

构造:

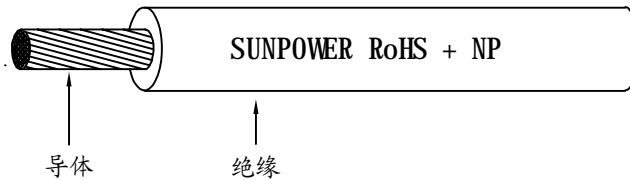

	导体		绝缘厚度 mm	完成外径 mm	标准包装	
	线号	构成			英尺/FT	公制/米
常用 非标 线	#32	5/0.11 ± 0.01		0.60 ± 0.05		1000
	#30	5/0.11 ± 0.01		0.80 ± 0.05		
	#30	7/0.10 ± 0.005		0.80 ± 0.05		
	#28	7/0.10 ± 0.005		1.05 ± 0.05		
	#26	9/0.10 ± 0.005		1.30 ± 0.10		500
	#24	14/0.10 ± 0.005		1.50 ± 0.10		
	#22	21/0.10 ± 0.005		1.80 ± 0.10		



新宝华电线有限公司
SUN POWER ELEC. WIRE CO. LTD

Address: Rm 5, 11/F, Wah Lai Ind Centre, 10-14 Kwai
Tei St, Fo Tan, Shatin, NT, HK
TEL: 2601 3622, 2687 0723 HTP: www.hksunpower.net
FAX: 2601 5816 E-mail: sunpower@hksunpower.net



明华电线厂
MING WA ELECTRIC WIRE MFG

工厂地址: 东莞市长安镇沙头瑾头工业区
TEL: 769-85540856 85540857 FAX: 769-85542221